

# **RP915B**

Pneumatic Tired Roller
Rigid Frame • 9 Pneumatic Tires • 15 Tons

## **Features:**

80 hp Cummins diesel engine.

Speed 0-16 mph.

All wheel oscillation allows uniform compaction on uneven surfaces.

Electronic Displacement Control (EDC) propel.

Side-to-side seat slide with 180° rotation.



**HELPING BUILD AMERICA'S ROADS SINCE 1909** 




## RP915B

#### Weights:

Empty	12,500 lbs.
. ,	21,800 lbs.
Dry sand	27,500 lbs.
Wet sand	(Maximum ballast) 30.500 lbs.

Empty	1,389 lbs.
Water	2,422 lbs.
Dry sand	3,055 lbs.
Wet sand	3 389 lbs

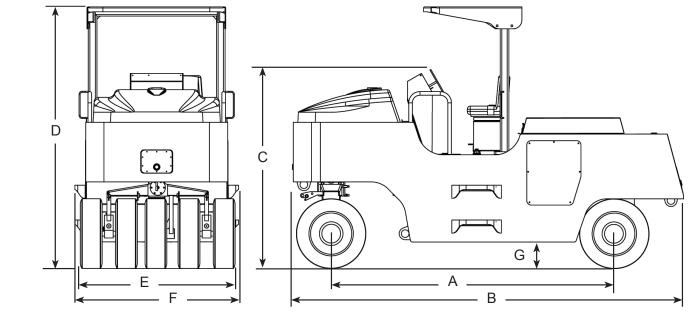

### **DIMENSIONS:**

<u>DIMETION OF</u>	
A. Wheelbase	130.5"
B. Overall length	180.0"
C. Overall Height	94.0"
D. Height w/ ROPS	119.0"
E. Rolling width	

F. Overall width	75.4"
G. Ground clearance	11.0"
Outside turning radius	254.0"
Inside turning radius	147.0"
Tire overlap	0.5"

#### **ENGINE**

Cummins B3.3 80 turbocharged diesel producing 80 hp @ 2200 rpm. Two stage air cleaner with condition indicator.

#### WHEELS & TIRES

7.50 X 15, 14-ply Compactor

#### **DRIVE SYSTEM**

Hydrostatic by means of a variable displacement piston pump and dual two-speed drive motors.

#### SPEEDS AND CONTROLS

Infinitely variable two-speed forward and reverse controlled by a single dash-mounted lever.

Low (working) 0-8 mph / High (travel) 0-16 mph

#### **FUEL SYSTEM**

40 US gallons

#### HYDRAULIC RESERVOIR

60 US gallons

#### SPRINKLER SYSTEM

110 gallon pressurized system

Position 1 - System OFF

Position 2 - System ON continuously

Position 3 - Auto ON/OFF with motion

#### STANDARD EQUIPMENT

Cummins water-cooled diesel engine. 14-Ply tires.

Cushioned seat with 180° rotation & side-to-side slide. Seat belt. Horn. ROPS. Vandal cover. Back-up alarm. Emergency engine shutdown.

Neutral safety and parking brake starter interlock. 110 gallon sprinkler system with cocoa mats CE yellow paint

#### OPTIONAL EQUIPMENT

Nylon scrapers. Heat retention shields Michelin non-stick radial tires Beacon light Lighting package including: Front working lights (2) Rear working lights (2) Turn signals.

ROPS canopy.

FOPS for ROPS.

\*Ingram Compaction, LLC, as part of it's program of continuous improvement, reserves the right to make changes in specifications and features without notice.



2300 South Street Racine, WI 53404 Ph: (262) 898-7338

Fax: (262) 633-5102 e-mail: info@ingramrollers.com



Sold & Serviced By: